

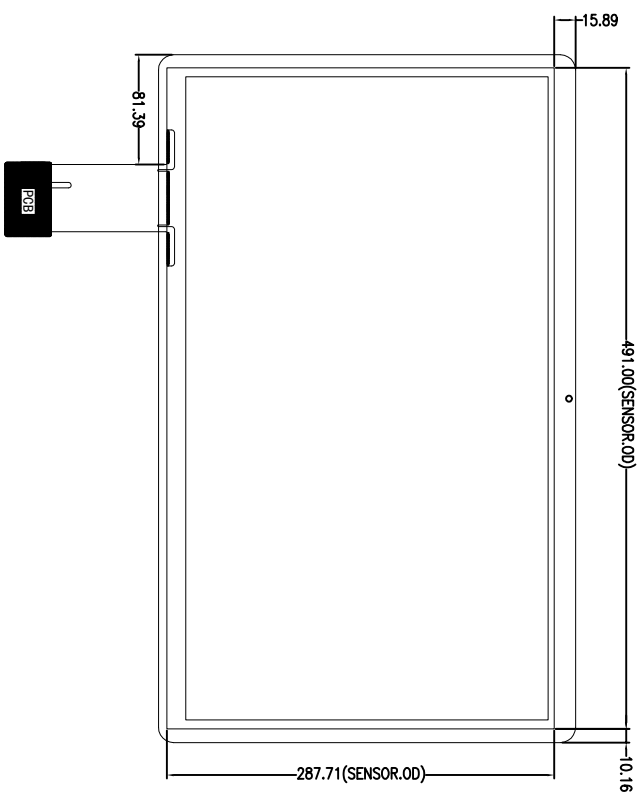
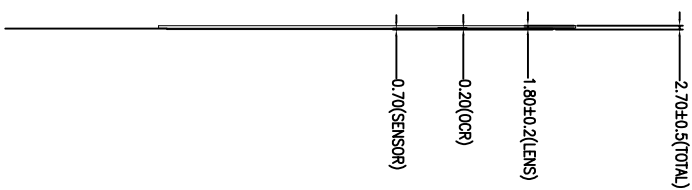


No ROHS hazardous material

Ordinal	Modify content description	Cartographer/plate of change
Δ		
Δ		

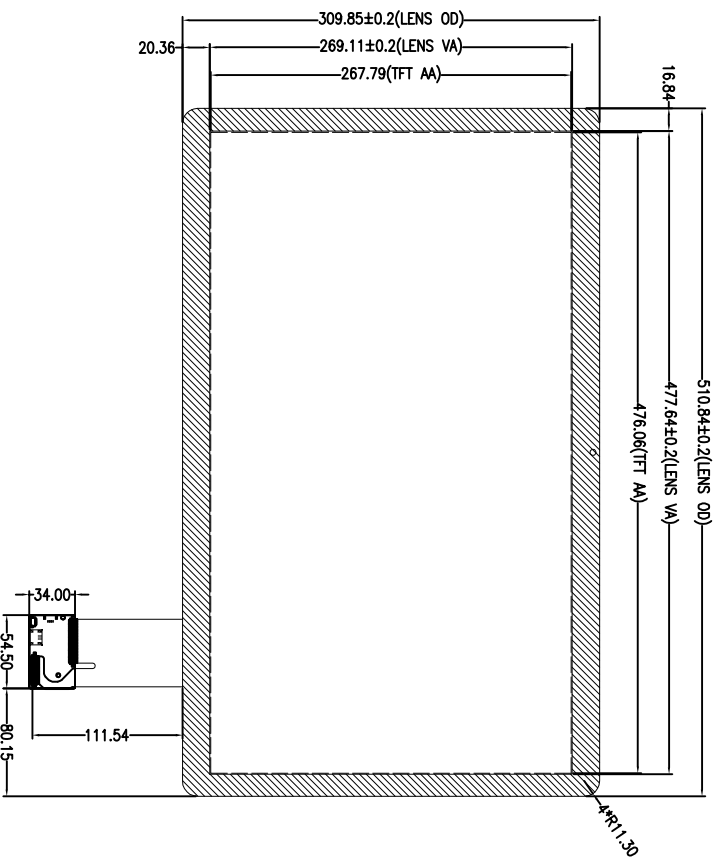

Screen printing area: Print Black

Front view

Side view


Back view

Technical parameters

1. Interfaces:	USB	7. Humidity range:	45~85%RH
2. Structure :	G+G	8. Transmittance:	≥85%
3. IC Solutions:	ILI2302M	9. Surface hardness:	≥6H
4. Impact Resistance:	30.00Phi, Steel Ball /132g/Height=50mm/Time	10. Operate :	-20°C~+70°C, ≤85%RH
5. Touch points:	10 points	11. Storage :	-30°C~+80°C, ≤85%RH
6. Power supply:	5V	12. Unmarked dimension tolerance	as±0.5

USB(4PIN)

PIN	Definition
1	VCC
2	D-
3	D+
4	GND



PCBA SCALE 2:1



杭州宏梟科技有限公司
GraHowlet Technology CO., Ltd

Model	HX2151703	View Direction	Unit	MM			
Version	V1.0	Designer	Jeson	Date	2017-3-21	Edition	AI
Customer	Approved	HBZ	Date	2017-3-21	Proportion	1:1	